



Features


- 22" WSXGA TFT Touch Panel PC
- 5-wire Resistive Touch Screen
- Intel® 910GML / 945GME / GME965 Chipset
- VGA, DVI, Audio
- Gigabit Ethernet, Optional WiFi Module
- 1 PCI, 3 COM, 6 USB
- 3.5" / 2.5" SATA HDD Supported
- VESA Compliance

Intel®	Touch Screen	GbE	WiFi	3 COM
PCI	6 USB	VESA	DVI	

Specifications

Model Name	FPC-22W01	FPC-22W02	FPC-22W03
• LCD Size	22", 16:10	22", 16:10	22", 16:10
• Display Type	WSXGA TFT	WSXGA TFT	WSXGA TFT
• Resolution	1680 x 1050	1680 x 1050	1680 x 1050
• Color	16.7 Million	16.7 Million	16.7 Million
• Pixel Pitch	0.282 mm (H) x 0.282 mm (V)	0.282 mm (H) x 0.282 mm (V)	0.282 mm (H) x 0.282 mm (V)
• Luminance	300 cd/m ²	300 cd/m ²	300 cd/m ²
• Contrast Ratio	700	700	700
• Viewing Angle	85 (U), 80 (D), 85 (L), 85 (R)	85 (U), 80 (D), 85 (L), 85 (R)	85 (U), 80 (D), 85 (L), 85 (R)
• Response Time	5 ms	5 ms	5 ms
• Back Light	4 x CCFLs	4 x CCFLs	4 x CCFLs
• Touch Screen	5-wire Resistive	5-wire Resistive	5-wire Resistive
• Light Transmission	80%	80%	80%
• Touch Interface	RS-232	RS-232	RS-232
System			
• CPU	Supports Intel® μFC-PGA Core™ Duo / Core™ Solo / Core™ 2 Duo with 65nm process technology	Supports Intel® socket P Core™ Duo / Core™ Solo / Core™ 2 Duo with 65nm process technology	Onboard Intel® uFC-BGA 479 Celeron® M 1 GHz w/OK 2nd Level Cache with 90nm process technology
• Cooling Method	Active CPU cooler	Active CPU cooler	Passive CPU heatsink
• System Chipset	Intel® 945GME / ICH7-M	Intel® GME965 / ICH8-M	Intel® 910GML / ICH6-M
• System Memory	2 x 240-pin DIMM socket supports up to 4 GB DDR2 533/667 SDRAM	2 x 200-pin SODIMM socket supports up to 4 GB DDR2 533/667	2 x 240-pin DIMM socket supports up to 2 GB DDR2 400 SDRAM
• SSD	1 x CompactFlash Type I/II socket (internal)	1 x CompactFlash Type I/II socket (internal)	1 x CompactFlash Type I/II socket (internal)
• VGA	1 x DB-15	1 x DB-15	1 x DB-15
• DVI	1 x DVI	1 x DVI	1 x DVI
• HDD Driver Bay	1 x 3.5" SATA or 1 x 2.5" SATA	1 x 3.5" SATA or 1 x 2.5" SATA	1 x 3.5" SATA or 1 x 2.5" SATA
• Audio	Line in, Line out, Mic in	Line in, Line out, Mic in	Line in, Line out, Mic in
• WiFi	Optional USB WiFi 802.11 b/g (occupy one USB port)	Optional USB WiFi 802.11 b/g (occupy one USB port)	Optional USB WiFi 802.11 b/g (occupy one USB port)
• System Fan	1 x system Fan	1 x system Fan	1 x system Fan
• Expansion Interface	1 x PCI slot	1 x PCI slot	1 x PCI slot
Rear I/O			
• Serial Port	3 x RS-232	3 x RS-232	3 x RS-232
• Ethernet	1 x RJ-45 (Realtek RTL8111B Gigabit Ethernet)	2 x RJ-45 (Realtek RTL8111B Gigabit Ethernet)	1 x RJ-45 (Realtek RTL8110SC Gigabit Ethernet)
• USB Port	6 x USB 2.0 (Optional extra 2 USB ports)	6 x USB 2.0 (Optional extra 4 USB ports)	6 x USB 2.0 (Optional extra 2 USB ports)
• Mouse & K/B	1 x PS/2 Keyboard Connector 1 x PS/2 Mouse Connector	1 x PS/2 Keyboard Connector 1 x PS/2 Mouse Connector	1 x PS/2 Keyboard Connector 1 x PS/2 Mouse Connector

Diagram

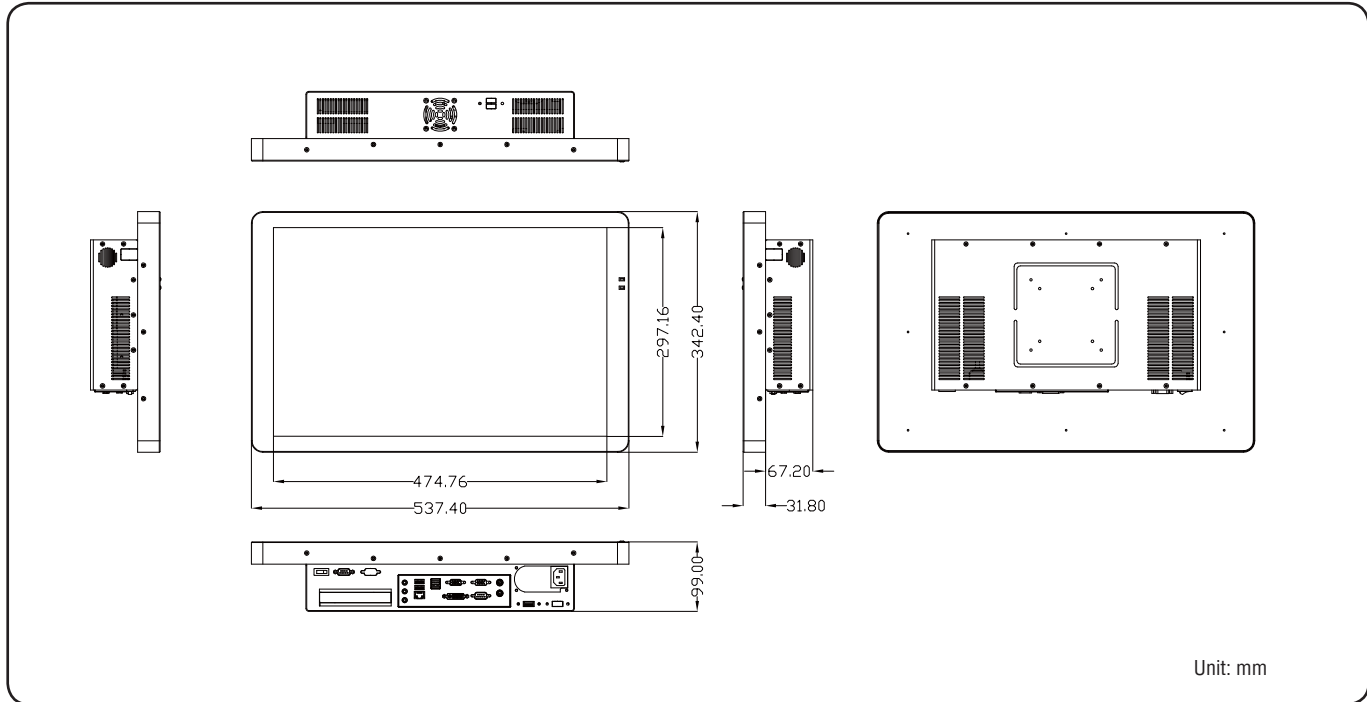

Environment & Mechanical

• Color	Front Panel Silver; Rear Body Black
• Mounting	Wall Mount/Stand/VESA 75 x 75 mm and 100 x 100 mm
• Power Supply	100-240 VAC (150W)
• Operating Temperature	0~40°C
• Storage Temperature	-10°C ~ 50°C
• Relative Humidity	10 to 95% @ 40°C, non-condensing
• Dimension (W x D x H)	537 mm x 342 mm x 99 mm
• Weight	10.5 kgs / 23 lbs

Ordering Information

- **FPC-22W01**
22" WSXGA TFT Touch Panel PC with Intel® 945GME Chipset, 5-wire resistive Touch Screen
- **FPC-22W02**
22" WSXGA TFT Touch Panel PC with Intel® GME965 Chipset, 5-wire resistive Touch Screen
- **FPC-22W03**
22" WSXGA TFT Touch Panel PC with Intel® 910GMLC Chipset, 5-wire resistive Touch Screen
- **ACC-WIFI-USB-5R**
VNT6656G6A40-OE+PL99G26-130011(ANTENNA)
- **ACC-ARM-D2R**
VESA STAND, 75 & 100 mm
- **ACC-CF-XX**
CompactFlash Card Series (xx=Capacity, Capacity Option: 128, 256, 512 MB, 1, 2, 4, 8 GB)
- **ACC-FPC-WALLMT-01R**
Wall Mount Bracket Kit for FPC-15~22W

1
Embedded System

2
LPC Series

3
PPC Series

4
FPC Series

5
VTP Series

6
MTP Series

7
ETX/COM Express

8
3.5" SBC

9
EPIC

10
Half-size

11
5.25" SBC

12
PC/104

13
Peripherals

14
Index