
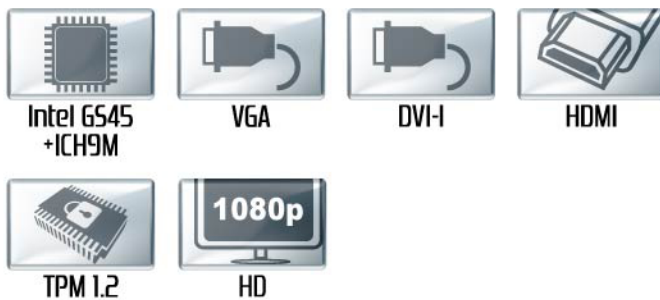


WindBOX III

Intel® Core™2 Duo Processor for Fanless System

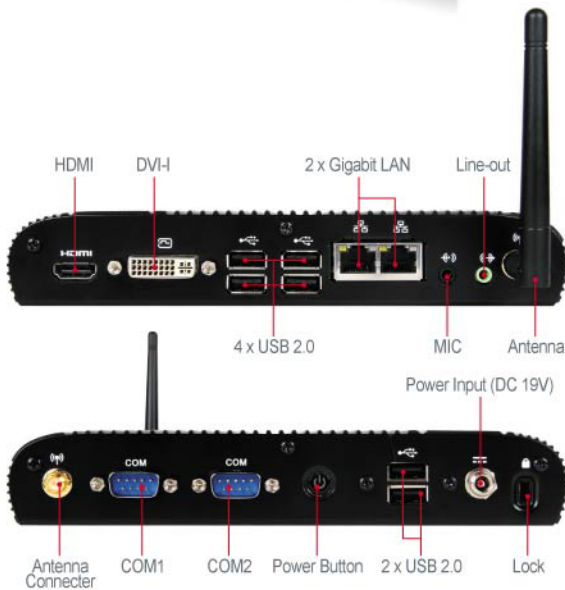

System

Processor	CPU	Intel® Core 2 Duo
System	Chipset	Intel GS45 + ICH9M
System	Technology	Dual channel DDR2 667/800 MHz
Memory	Max. Capacity	Up to 4 GB
	Socket	2 x 200-pin SODIMM
Display	Graphic Controller	Intel® Graphics Media Accelerator (GMA) 4500MHD
	LVDS	Supports 24-bit dual channel Resolution: Up to 2048 x 1536 (QXGA)
	DVI	Chrontel CH7318C SDVO transmitter Resolution: Up to 1920 x 1080 (1080P)
	HDMI	Supports HDMI 1.3, Type A, 19-pin Resolution: Up to 1920 x 1080 (1080P)
	Display port	N/A
	Dual Display	CRT + DVI, CRT + HDMI
Ethernet	Controller	LAN1: Intel 82574L GbE LAN LAN2: Intel 82574L GbE LAN
	Wireless	WLAN 802.11 b/g/n
Module	Blue Tooth	1T1R+BT2.1 EDR Combo Module
Audio	Controller	Realtek ALC888 HD audio codec (Mic-in, Line-out)
I/O Interface	USB	6 (USB 2.0 compliant, 2 x Front, 4 x Rear)
	Serial	2 (2 x RS232/485/422, supply 0V/5V/12V)
	Parallel	N/A
	PS/2	N/A
	IrDA	N/A
	GPIO	N/A
	IEEE 1394	N/A
	Expansion Slot	PCIe x 16
Storage	PCIe x 4	N/A
	PCIe x 1	N/A
	PCI	N/A
	Mini-PCIe	PCIe x1, 2 slots
	USIM	1
	MXM	N/A
	SATA	2 x SATA II, Max. transfer rate 3Gb/s (1 x SATA II for 2.5" HDD)
IDE	N/A	
eSATA	N/A	
Compact Flash	N/A	
Operating System		Windows XP / XPE / 7
Power	Power Adaptor	DC 19V, 65W
	Power Supply	N/A
Environment	Operating Temperature	0°C ~ 60°C (32 ~ 140 F)
	Storage Temperature	-20°C ~ 80°C (-4 ~ 176 F)
	Operating Humidity	0%~90% relative humidity, noncondensing
	Storage Humidity	0%~90% relative humidity, noncondensing
Chassis	Dimensions	196 mm x 285 mm x 33 mm
	Weight	2.6 Kg
	Mounting	VESA mount
Regulatory Compliance		FCC, CE, C-Tick, VCCI
		RoHS compliant

Ordering Information

Part Number	Description
9S9-9A35-001	WindBOX III, INTEL FANLESS SYSTEM, BAREBONE WLAN+BT 3872, EU POWER, DRIVER CD SINGLE
9S9-9A35-002	WindBOX III, INTEL FANLESS SYSTEM, BAREBONE WLAN+BT 3872, USA POWER, DRIVER CD SINGLE
9S9-9A35-003	Full system, HDD, Memory, WLAN+BT 3872, EU POWER CORD, DRIVER CD SINGLE
9S9-9A35-004	Full system, HDD, Memory, WLAN+BT 3872, USA POWER CORD, DRIVER CD SINGLE

Packing List

Part Number	Description	Quantity
S93-0401330-S14	ADAPTOR	1
K33-3001021-I45	POWER CORD,EUROPE	1
K33-3001020-I45	POWER CORD,USA	1
S79-0000360-V03	RF ANTENNA	2
G71-SEDC043-J24	DRIVER CD	1
E22-9A25031-C22	VESA 75/100 MOUNTING BRACKET	1

Features

- Slim and Fanless System Design with Mini-ITX Board Inside
- Great 3D Graphics Performance for a High Definition Up to 1080p
- Multiple Video Output HDMI, DVI-I with Dual Independent display
- Support DirectX10, Shader Model 4.0 and Intel® Clear Video Technology
- Built-in WiFi 802.11b/g/n and Blue-Tooth Module
- Flexible Design for Easy Change Memory and HDD

X86-based
 RISC-based
 3.5" Mainboard
 Mini-ITX Mainboard
 Micro-ATX Mainboard
 PTCMG Mainboard